

Spirale, pužnice, šneke ø vanjski x korak x ø unut. x debljina	Prepor. promjer unutarnje cijevi
ø 50 x 50 x 13,5 x 1,7	ø 60
ø 60 x 60 x 22 x 3	
ø 70 x 70 x 22 x 3	
ø 80 x 80 x 21,3 x 1,7	ø 90
ø 80 x 80 x 27 x 3	
ø 90 x 90 x 27 x 5	ø 100
ø 90 x 90 x 27 x 3	
ø 90 x 90 x 27 x 6	
ø 90 x 70 x 22 x 3	
ø 100 x 100 x 34 x 3	ø 114 ili ø 120
ø 106 x 110 x 42 x 3	
ø 110 x 110 x 27 x 3	ø 120
ø 110 x 110 x 34 x 3	
ø 120 x 120 x 34 x 3	ø 133
ø 120 x 120 x 34 x 5	
ø 130 x 100 x 60 x 8	
ø 130 x 130 x 34 x 3	ø 150
ø 135 x 110 x 38-3,5	
ø 140 x 140 x 42 x 3,5	
ø 138 x 80 x 42 x 3,5	
ø 150 x 90 x 48 x 5	ø 159 ili ø 170
ø 150 x 100 x 48 x 3,5	
ø 150 x 150 x 48 x 3,5	
ø 150 x 150 x 48 x 6	
ø 160 x 160 x 48 x 3,5	ø 170
ø 160 x 100 x 48 x 3,5	
ø 160 x 160 x 48 x 6	
ø 180 x 180 x 48 x 3,5	ø 200
ø 180 x 100 x 48 x 3,5	
ø 180 x 140 x 48 x 3,5	
ø 200 x 150 x 48 x 6	ø 214
ø 200 x 200 x 48 x 4	
ø 200 x 200 x 50 x 8	
ø 220 x 220 x 60 x 4	ø 250
ø 230 x 230 x 60 x 5	
ø 230 x 170 x 48 x 3	
ø 240 x 200 x 48 x 6	
ø 250 x 180 x 60 x 4	ø 300
ø 250 x 250 x 60 x 4	
ø 300 x 300 x 76 x 5	
ø 300 x 300 x 90 x 6	
ø 350 x 350 x 90 x 5	
ø 400 x 400 x 102 x 8	
ø 500 x 500 x 160 x 10/5,5	

Tel. 01 / 20 44 866

Fax. 01 / 20 44 955

www.tehnopan.com

vili@tehnopan.com

TehnoPAN



Prekvršje, Prigorska 30. 10362 Kašina

Spirale, pužnice, šneke

INOX ø 60 x 60 / ø 22 x 3

INOX ø 80 x 80 / ø 22 x 3

INOX ø 80 x 80 / ø 27 x 3

INOX ø 100 x 70 x 33,7 x 4

INOX ø 100 x 100 x 33,7 x 4

INOX ø 120 x 120 x 33,7 x 4

INOX ø 130 x 130 x 33,7 x 4

INOX ø 150 x 150 x 48 x 4

INOX ø 250 x 250 x 60 x 5

$$N = \frac{Q^*L}{130} * 1,25 \text{ (kW)}$$

N - snaga motora

Q - kapacitet

L - duljina (m)


Kapacitet puža

kod 500 o/min:

ø100 -> 10 t/h

ø120 -> 15 t/h

ø150 -> 18 t/h

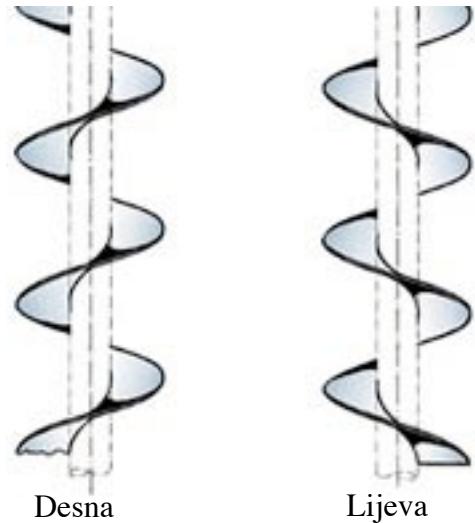

Sve gore navedene mjere spirala na skladištu u duljini 3 m. Tankostijene cijevi duljine 6 m na skladištu. Debljina stijenke cijevi od 1.5 do 2 mm.